


SPECIFICATION

Supply Terminals	A1-A2
Rated Voltage	AC220-240V
Rated Frequency	50/60Hz
Power Consumption	1W
Supply Voltage Tolerance	± 10%
Number of Channels	1
Program	astronomical
Mode of work	manual, automatic, holiday
Summer/winter time	off, automatic changes
Time Tolerance	≤ 1s/day at 20°C
Power Reserve	3 year
Data Readout	LCD display
Number of Contacts	1 C/O
Switching Capacity	16A/250V AC1
Electrical Life	4000VA/AC, 384W/DC
Mechanical Life	10 ⁶
Reted	10 ⁵
Insulation Voltage	250V
Protection Degree	IP20
Pollution Degree	3
Altitude	≤ 2000m
Ambient Temperature	-30°C~55°C
Storage Temperature	≤ 50%(40°C, without condensation)
Wire Size	-35°C~70°C
Tightening Torque	1mm ² ~ 4mm ²
Size	0.5Nm
Mounting	TH-35 Rail(EN60715)
Dimensions	90*36*64mm
Standard	IEC60947-1/IEC60947-2-7

DIMENSIONS

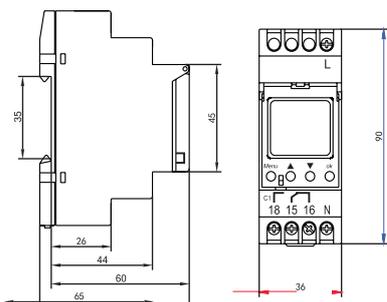

WIRING DIAGRAM

