



STAIRCASE LIGHTING TIME


Model No: SMART-SLT 190

- Microcontroller Based
- Modular Design 18mm Wide Housing
- Possibility of 3 wire or 4 Wire Connection.
- ON, OFF, AUTO Three Operating Modes
- Repartition Accuracy <0.2%, LED
- DIN-Rail Mounting





APPLICATION

3 wire connection



4 wire connection

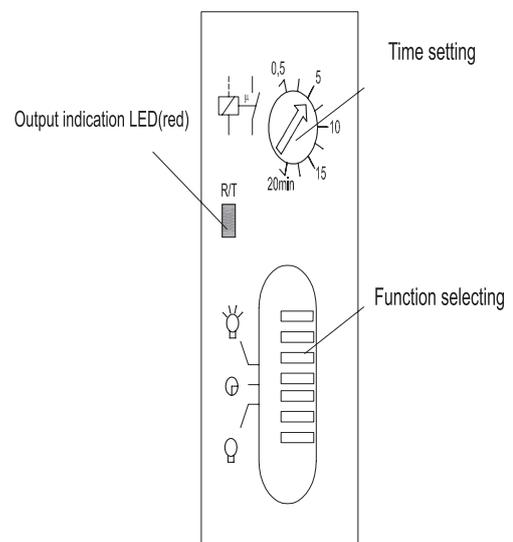


SPECIFICATION

Rated Supply Voltage	AC230VAC,50/60Hz
Type of Contact	1NO(AgNi)
Rated Current (Lth)	10A
Power Consumption	≤1.5VA
Incandescent Lamp Load	2000W
Fluorescent Lamp Load,Leat-lag Circuit	1000W
Fluorescent Lamp Load, Inductive-Capactive	1000W
Fluorescent Lamp Load, Co ϕ =0.6 @ 230 V	650W
Mechanical	650W
Electrical	5 ϕ
Time Range	6 ϕ
Setting	0.5-20m
Repetition	≤5%
Altitude	≤0.2%
Protection Degree	50mA
Pollution Degree	≥200ms
Storage	≤2000m
IP	IP20
Mode	3
Work Temperature	-5°C~+40°C
Temperature Operation	-25°C~+75°C



DIMENSIONS

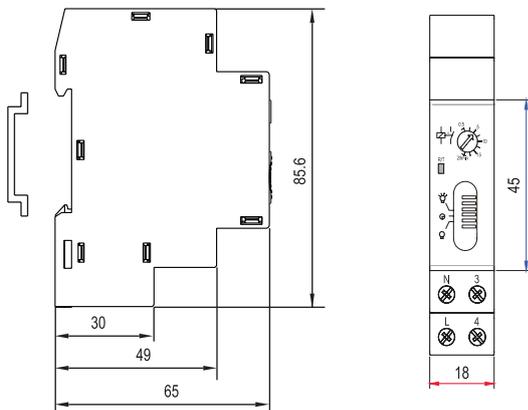

WIRING DIAGRAM

